

LIFT DIMENSION (RESIDENTIAL)

Capacity		Speed	Hoistway	Overhead	Pit Depth	Cabin Size	Door Opening
No. of Persons	Weight (kg)	(m/s)	W x D (mm)	(mm)	(mm)	W x D x CH (mm)	W x H (mm)
4	320kg	0.4	1700 x 1450	3500	500	900 x 1100 x 2500	700 x 2100 Centre Opening
4	320kg	0.4	1900 x 1450	3500	500	900 x 1100 x 2500	800 x 2100 Centre Opening
6	450kg	0.4	1700 x 1800	3500	500	1000 x 1350 x 2500	700 x 2100 Centre Opening
6	450kg	0.4	1900 x 1800	3500	500	1000 x 1350 x 2500	800 x 2100 Centre Opening

*All shaft size based on frameless glass door spec.

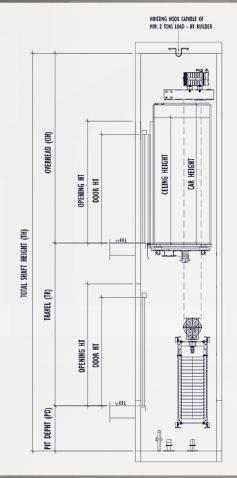



LIFT DIMENSION (COMMERCIAL DESIGN)

Capacity		Speed	Shaft Size W x D	Overhead	Pit	Car Size W X D X CH	Door Opening W x H
No. of Persons	Weight (kg)	(m/s)	(mm)	(mm)	(mm)	(mm)	(mm)
9	615kg	1.0	2000 x 2050	4000	1450	1100 x 1450 x 2500	700 x 2100 Centre Opening
11	750kg	1.0	2250 x 2000	4000	1450	1350 x 1400 x 2500	800 x 2100 Centre Opening

^{*}All shaft size based on frameless glass door spec.

